


1. Physical Feature

1.1 Picture




1.2 Dimension

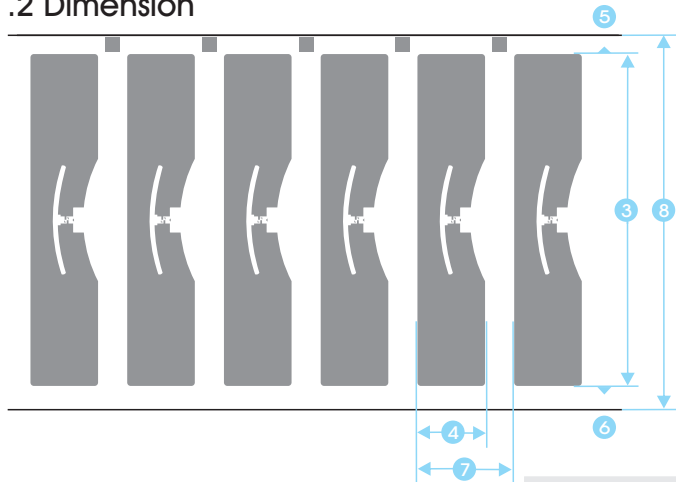

NO.	Item	Dimension mm
1	Core ID	6inch (152.4±0.5)
2	Roll OD	≤350
3	Antenna Length	93±0.5
4	Antenna Width	19±0.5
5	Web Width - a	6.5±0.5
6	Web Width - b	6.5±0.5
7	Inlay Pitch	53±0.5
8	Web Width	106±0.5

Located in the lower surface of the chip

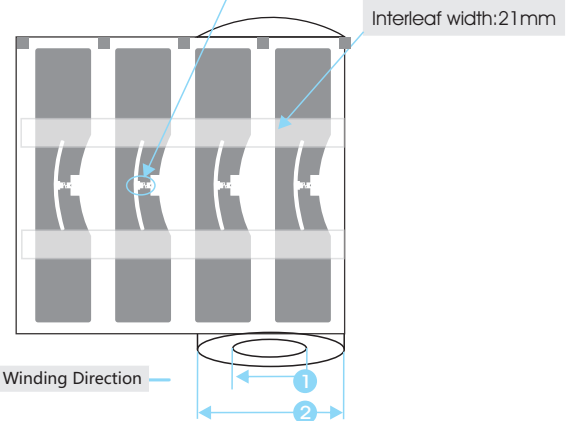

2. Electrical Specification

Item	Description	Remark
IC	Alien/Higgs3	
Substrate	PET	
Antenna Process	Aluminum ETCH (AL 9um)	
Protocols Supported	ISO/IEC 18000-6C EPC Class1 Gen2	
EPC	96Bits	Read/write
TID	64Bits	Read only
Password	32Bits Allers Password 32Bits Kill password	Read/write
User Memory	512Bits	Read/write
Operating Frequency	860~960MHz	
Operating Mode	Passive	
Write Cycles	100,000	
ESD-HBM/CDM	2000V	HBM

3. Operating Warning

- 3.1 Inlays with black ink dot are for bad products, do not use. Position is shown on the right.
- 3.2 When carrying and applying inlays, keep away from water, violent bump and squeezing.
- 3.3
 Operating Limits : - 40 ~ 70°C/ 20% ~ 90% RH.
 Storage Limits : - 20 ~ 50°C / 20% ~ 90% RH(Without condensation).
 The recommended storage temperature : 20 ~ 30°C / 50% RH.

Marking of bad ones



4. Package

Inlay Format in roll

Delivery Format 20000±100pcs/roll , 1 rolls /carton

Package Format	1, Each roll of inlay has two strips of 21mm-width glassine paper as mounts to protect chip and antenna, so as to avoid extrusion and water vapor.
	2, Waterproof, anti-collision, antistatic
	3, In antistatic bags